

BATTERY POWERED CRANE CONVERSIONS






Conversion Packages for Broderson, Shuttlelift & Yard Boss

HIGH CAPACITY BATTERY SYSTEMS

24V-80V Lead Acid Typically Located in Engine Bay

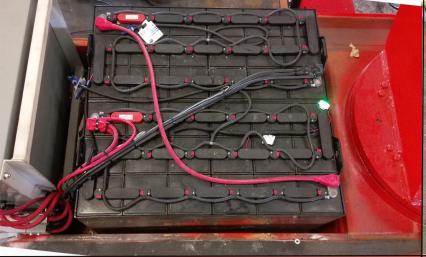

OPTIONAL RATED LOAD LIMITER

Uses LSI Sensors Integrated on Any Brand/Model



BATTERY CHARGER

480/240/208 Volts, Typical Charge Time 8 Hours



OPTIONAL CHARGING ENGINE

Run Continuous or Charge Battery for Next Day



Conversion Consists of Replacement of many of the Following Components:

- √ Pumps
- √ Motors
- √ Transmission
- √ Hydraulic Components

- Custom Paint Including:
- √ Mild Sand and Paint
- √ Complete Strip & Paint
- √ Customer Colors and Designs
- ~ Take-Off Parts are Returned for Future Use as Repair Parts. ~